

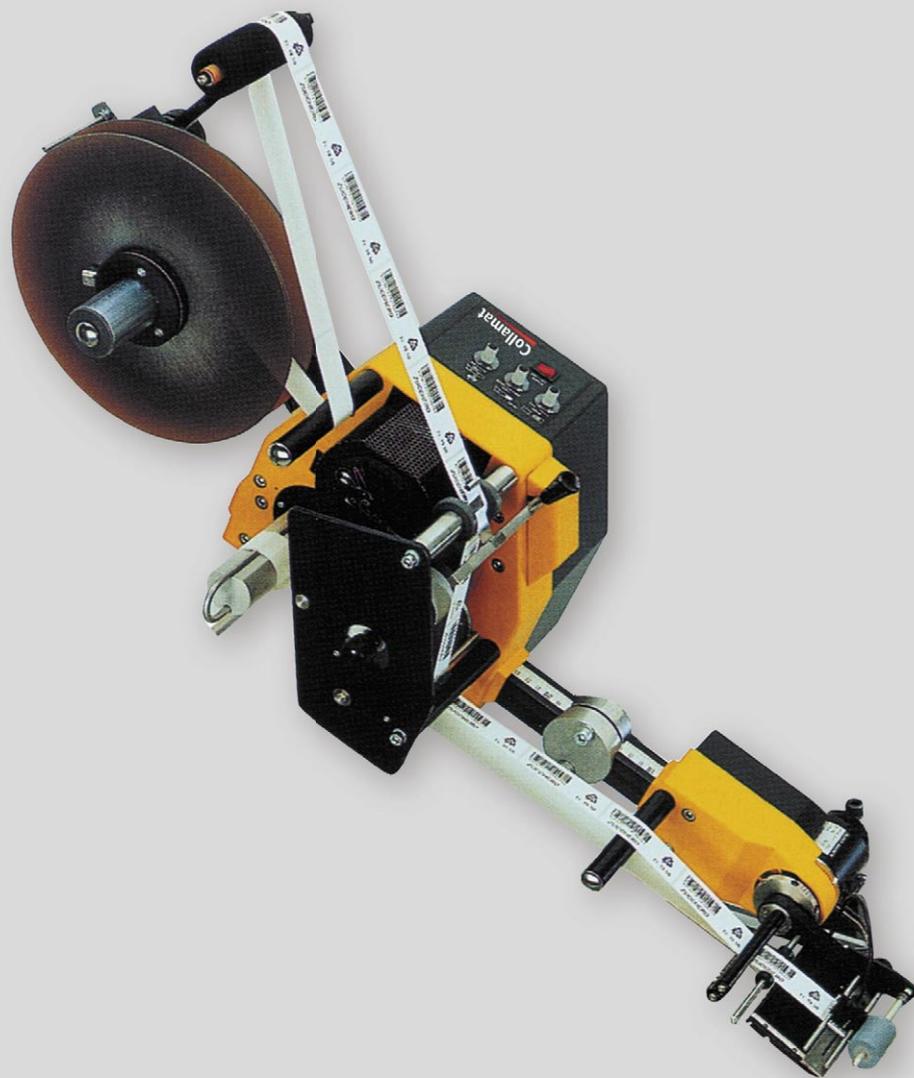


Collamat® 3600

The multifunctional. With the Collamat® 3600 labelling system you get a perfect solution for any standard application. It is compact, space-saving, easy to operate and offers a speed range from 3 - 20 m/min. The typical Collamat modularity allows you to configure the system best possible to your production requirements. Designed for semi or fully automated applications the Collamat® 3600 offers an optimal solution for smaller productions with demands to long lasting functionality and reliability.

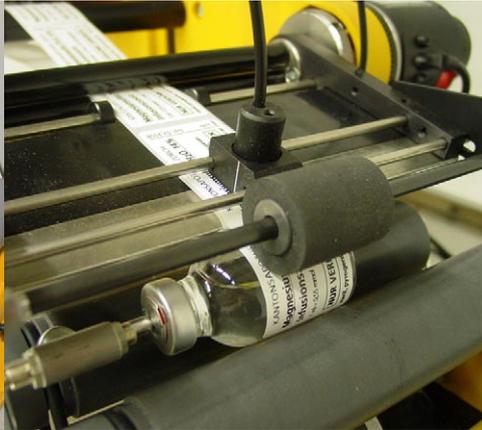

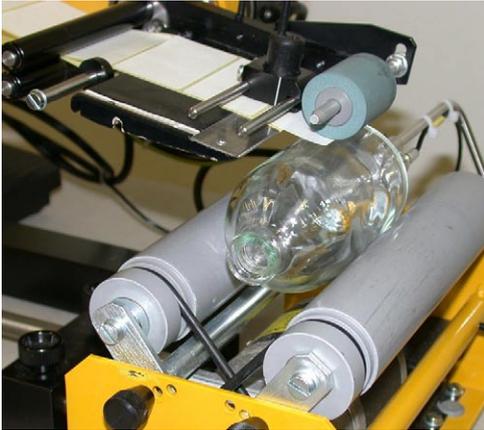

FEATURES

- Flexibility – Wide application range due to the availability of various applicators to suit specific products
- Collamat design – Controller, drive unit, rewinder and control panel integrated in one space-saving unit
- Expandable – Prepared for communication and installation of printers, hot stamps or ink jets
- Modularity – Easy adaptation to new application requirements
- Easy operation – Application settings can easily be changed by 3 potentiometers
- Mono rail mounting – Easy plug-in expansion for options
- 3 steps – Do the set up for the label scanner, predispensing and application speed – and you are ready to work

TECHNICAL DATA

Operational width:	95 mm (3 3/4 in) or 160 mm (6 1/3 in)
Max feeding speed:	20 m/min (6 ft/min)
Labelling accuracy:	± 1 mm (1/25 in)
Min. label length:	10 mm (10/25 in)
Max label reel diameter:	350 mm (14 in)
Settings by potentiometer:	Variable speed adjustment, label scanner sensitivity
Drive:	2 phase stepping motor
Control:	16 bit microprocessor
Voltage:	115–230 V / 50–60 Hz / 110 VA
Approbation:	CE/Gost

All data are indicative and may be subject to alteration

HM Collamat AG
Pfeffingerring 201
CH-4147 Aesch

Phone: +41 (0)61 756 28 28
Fax: +41 (0)61 756 29 29
Web: www.collamat.ch
E-mail: contact@collamat.ch

Member of HM Group