




Socket Shoulder Screws

Nylon Locking

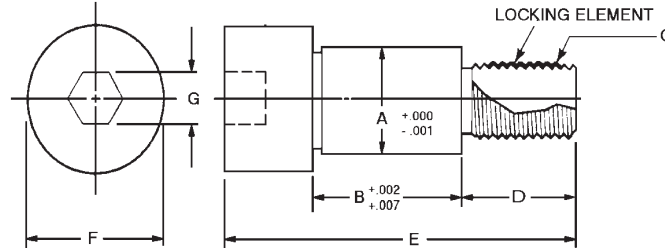

Socket Shoulder Screws are held to much closer tolerances than on standard Strip-per Bolts. The “B” dimension is always a plus to eliminate the binding on movable plates. The “A” dimension is held closer for bearing-type locating. You’ll get more positive holding power and greater turning leverage. Ideal for all sliding mechanisms. Nylon locking element is incorporated in all Jergens Shoulder Screws.

- Material: 4140
- Heat Treat: Rc 38-42
- Thread: 2A-UNC

Diameter A	B	Part Number	Thread Size C	D	E	F	Hex Size G	Wt. (lbs) 10 Pcs.
.249	1/4	41701*	10-24	3/8	13/16	3/8	1/8	.09
.249	3/8	41702*	10-24	3/8	15/16	3/8	1/8	.12
.249	1/2	41703*	10-24	3/8	1 1/16	3/8	1/8	.13
.249	5/8	41704*	10-24	3/8	1 3/16	3/8	1/8	.15
.249	3/4	41705*	10-24	3/8	1 5/16	3/8	1/8	.16
.249	7/8	41706*	10-24	3/8	1 7/16	3/8	1/8	.19
.374	1/4	41707*	5/16-18	1/2	1	9/16	3/16	.30
.374	3/8	41708*	5/16-18	1/2	1 1/8	9/16	3/16	.32
.374	1/2	41709*	5/16-18	1/2	1 1/4	9/16	3/16	.38
.374	5/8	41710*	5/16-18	1/2	1 3/8	9/16	3/16	.41
.374	3/4	41711*	5/16-18	1/2	1 1/2	9/16	3/16	.45
.374	7/8	41712*	5/16-18	1/2	1 5/8	9/16	3/16	.48
.499	3/8	41713*	3/8-16	5/8	1 5/16	3/4	1/4	.68
.499	1/2	41714*	3/8-16	5/8	1 7/16	3/4	1/4	.73
.499	5/8	41715*	3/8-16	5/8	1 9/16	3/4	1/4	.78
.499	3/4	41716*	3/8-16	5/8	1 11/16	3/4	1/4	.86
.499	7/8	41717*	3/8-16	5/8	1 13/16	3/4	1/4	.93
.624	1/2	41718*	1/2-13	3/4	1 5/8	7/8	5/16	1.22
.624	5/8	41719*	1/2-13	3/4	1 3/4	7/8	5/16	1.36
.624	3/4	41720*	1/2-13	3/4	1 7/8	7/8	5/16	1.41
.624	7/8	41721*	1/2-13	3/4	2	7/8	5/16	1.56
.624	1	41722*	1/2-13	3/4	2 1/8	7/8	5/16	1.85
.749	5/8	41723*	5/8-11	7/8	2	1	3/8	2.25
.749	3/4	41724*	5/8-11	7/8	2 1/8	1	3/8	2.47
.749	7/8	41725*	5/8-11	7/8	2 1/4	1	3/8	2.60
.749	1	41726*	5/8-11	7/8	2 3/8	1	3/8	2.75
.749	1 1/4	41727*	5/8-11	7/8	2 5/8	1	3/8	2.90
.999	1	41728	3/4-10	1	2 5/8	1 3/8	1/2	5.47
.999	1 1/2	41729	3/4-10	1	3 1/8	1 3/8	1/2	6.56
.999	2	41730	3/4-10	1	3 5/8	1 3/8	1/2	7.66

*Conforms to TCMA

WORKHOLDING COMPONENTS